

**(19) World Intellectual Property Organization
International Bureau**



1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1

(43) International Publication Date
23 August 2001 (23.08.2001)


PCT

(10) International Publication Number
WO 01/60545 A1

- | | |
|---|--|
| <p>(51) International Patent Classification⁷: B21D 39/00, B23P 17/00, E21B 23/00, 29/00, 33/00, 19/00, 19/16, 23/08, 23/10</p> <p>(21) International Application Number: PCT/US01/04753</p> <p>(22) International Filing Date: 14 February 2001 (14.02.2001)</p> <p>(25) Filing Language: English</p> <p>(26) Publication Language: English</p> <p>(30) Priority Data:
60/183,546 18 February 2000 (18.02.2000) US</p> <p>(71) Applicant (for all designated States except US): SHELL OIL COMPANY [US/US]; 910 Louisiana Street, Houston, TX 77252-2463 (US).</p> | <p>(72) Inventors; and
(75) Inventors/Applicants (for US only): COOK, Robert, Lance [US/US]; 934 Caswell Court, Katy, TX 77450 (US). BRISCO, David, P. [US/US]; 405 Westridge Drive, Duncan, OK 73533 (US). STEWART, Bruce, R. [GB/NL]; Wassenaarseweg 208, NL-2596 EC The Hague (NL). RING, Lev [RU/US]; 14126 Heatherhill Place, Houston, TX 77077 (US). HAUT, Richard, Carl [US/US]; 502 Lakebend Drive, Sugar Land, TX 77479-5831 (US). MACK, Robert, Donald [US/US]; 22435 Vobe Court, Katy, TX 77449 (US). DUELL, Alan, B. [US/US]; 1408 Wisteria, Duncan, OK 73533 (US).</p> <p>(74) Agents: BECKER, Jeffrey, M. et al.; Haynes and Boone, LLP, Suite 4300, 1000 Louisiana, Houston, TX 77002 (US).</p> <p>(81) Designated States (national): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK,</p> |
|---|--|

[Continued on next page]

(54) Title: EXPANDING A TUBULAR MEMBER

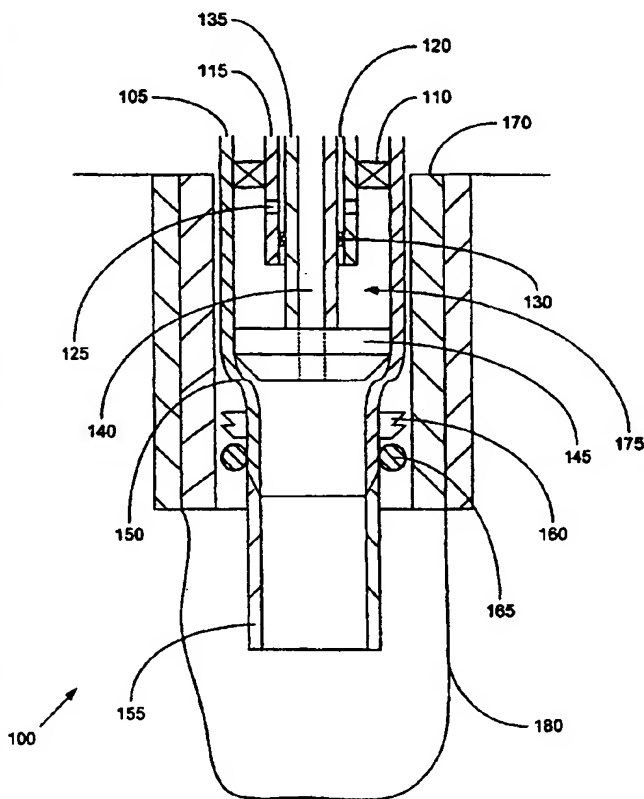

(57) Abstract: A tubular member is expanded by pressurizing an interior region within the tubular member.

WO 01/60545 A1



DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

- (84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US01/04753

A. CLASSIFICATION OF SUBJECT MATTER:

IPC (7):

B21D 39/00; B23P 17/00; E21B 23/00, 29/00, 33/00, 19/00, 19/16, 23/08, 23/10,

A. CLASSIFICATION OF SUBJECT MATTER:

US CL :

29/507, 523, 512, 421.1; 166/141, 142, 183, 187, 277, 285, 378, 380, 383, 153, 155

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US01/04753

A. CLASSIFICATION OF SUBJECT MATTER IPC(7) : Please See Extra Sheet. US CL : Please See Extra Sheet. According to International Patent Classification (IPC) or to both national classification and IPC				
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) U.S. : 29/507, 523, 512, 421.1; 166/141, 142, 183, 187, 277, 285, 378, 380, 383, 153, 155 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)				
C. DOCUMENTS CONSIDERED TO BE RELEVANT				
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
X	US 5,664,327 A (SWARS) 09 SEPTEMBER 1997, SEE ENTIRE DOCUMENT	1,27		
A	US 5,857,524 A (HARRIS ET AL.) 12 JANUARY 1999, SEE ENTIRE DOCUMENT	1-64		
A	US 5,794,702 A (NOBILEAU) 18 AUGUST 1998, SEE ENTIRE DOCUMENT	1-64		
A	US 5,332,038 A (TAPP ET AL.) 26 JULY 1994, SEE ENTIRE DOCUMENT	1-64		
A	US 3,887,006 A (PITTS) 03 JUNE 1975, SEE ENTIRE DOCUMENT	1-64		
A	US 4,025,422 A (HARDWICK) 03 JUNE 1980, SEE ENTIRE DOCUMENT	1-64		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.				
<table border="0"> <tr> <td> * Special categories of cited documents: *A* document defining the general state of the art which is not considered to be of particular relevance *E* earlier document published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed </td> <td> *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art *A* document member of the same patent family </td> </tr> </table>			* Special categories of cited documents: *A* document defining the general state of the art which is not considered to be of particular relevance *E* earlier document published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art *A* document member of the same patent family
* Special categories of cited documents: *A* document defining the general state of the art which is not considered to be of particular relevance *E* earlier document published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art *A* document member of the same patent family			
Date of the actual completion of the international search 17 JUNE 2001		Date of mailing of the international search report 03 JUL 2001		
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230		Authorized officer TOM HUGHES Telephone No. (703) 308-1146 <i>Sheila Venev</i> <i>Patent Specialist</i> <i>Technology Center 3700</i>		

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US01/04753

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A, E	US 6,226,855 B1 (MAINE) 08 MAY 2001, SEE ENTIRE DOCUMENT	1-64

patent application number _____, attorney docket number 25791.8.02, filed on 2-10-2000, which claimed the benefit of the filing date of provisional patent application number 60/119,611, attorney docket number 25791.8, filed on 2-11-1999; (4) provisional patent application number 60/121,702, attorney docket number 25791.7, filed on 2-25-1999; (5) provisional patent application number 60/121,841, attorney docket number 25791.12, filed on 2-26-1999; (6) provisional patent application number 60/121,907, attorney docket number 25791.16, filed on 2-26-1999; (7) provisional patent application number 60/124,042, attorney docket number 25791.11, filed on 3-11-1999; (8) provisional patent application number 60/131,106, attorney docket number 25791.23, filed on 4-26-1999; (9) provisional patent application number 60/137,998, attorney docket number 25791.17, filed on 6-7-1999; (10) provisional patent application number 60/143,039, attorney docket number 25791.26, filed on 7-9-1999; (11) provisional patent application number 60/146,203, attorney docket number 25791.25, filed on 7-29-1999; (12) provisional patent application number _____, attorney docket number 25791.29, filed on 9-16-1999; (13) provisional patent application number _____, attorney docket number 25791.34, filed on 10-12-1999; (14) provisional patent application number _____, attorney docket number 25791.36, filed on 10-12-1999; (15) provisional patent application number 60/159,033, attorney docket number 25791.37, filed on 10-12-1999; (16) provisional patent application number _____, attorney docket number 25791.27, filed on 11-01-1999.

Applicants incorporate by reference the disclosures of these applications.

Background of the Invention

This invention relates generally to wellbore casings, and in particular to wellbore casings that are formed using expandable tubing.

Conventionally, when a wellbore is created, a number of casings are installed in the borehole to prevent collapse of the borehole wall and to prevent undesired outflow of drilling fluid into the formation or inflow of fluid from the formation into the borehole. The borehole is drilled in intervals whereby a casing which is to be installed in a lower borehole interval is lowered through a

EXPANDING A TUBULAR MEMBER

Cross Reference To Related Applications

The present application claims the benefit of the filing date of U.S. provisional patent application serial no. 60/183,546, attorney docket no.

5 25791.10, filed on 2/18/2000, the disclosure of which is incorporated herein by reference.

This application is a continuation-in-part of U.S. Serial No. 09/559,122, attorney docket number 25791.23.02, filed on 4/26/2000, which claimed the benefit of the filing date of U.S. provisional patent application serial number
10 60/131,106, filed on 4/26/1999, which was a continuation-in-part of U.S. patent application serial number 09/523,460, attorney docket number 25791.11.02, filed on 3/10/ 2000, which claimed the benefit of the filing date of U.S. provisional patent application serial no. 60/124,042, filed on 3/11/1999, which was a continuation-in-part of U.S. patent application serial number 09/510,913,
15 attorney docket number 25791.7.02, which claimed the benefit of the filing date of U.S. provisional patent application serial number 60/121,702, filed on 2/25/1999, which was a continuation-in-part of U.S. patent application serial number 09/502,350, attorney docket number 25791.8.02, filed on 2/10/2000, which claimed the benefit of the filing date of U.S. provisional patent
20 application serial number 60/119,611, attorney docket number 25791.8, filed on 2/11/1999, which was a continuation-in-part of U.S. patent application serial number 09/454,139, attorney docket number 25791.3.02, filed on 12/3/1999, which claimed the benefit of the filing date of U.S. provisional patent application serial number 60/111,293, filed on 12/7/1998.

25 The present application is related to the following U.S. patent applications: (1) utility patent application number _____, attorney docket number 25791.9.02, filed on 11-16-1999, which claimed the benefit of the filing date of provisional patent application number 60/108,558, attorney docket number 25791.9, filed on 11-16-1998; (2) utility patent application number
30 _____, attorney docket number 25791.3.02, filed on 12-3-1999, which claimed the benefit of the filing date of provisional patent application number 60/111,293, attorney docket number 25791.3, filed on 12-7-1998; (3) utility

According to another embodiment of the present invention, an apparatus for radially expanding a tubular member is provided that includes a first tubular member, a second tubular member positioned within the first tubular member, a third tubular member movably coupled to and positioned within the
5 second tubular member, a first annular sealing member for sealing an interface between the first and second tubular members, a second annular sealing member for sealing an interface between the second and third tubular members, and a mandrel positioned within the first tubular member and coupled to an end of the third tubular member.

10 According to another embodiment of the present invention, an apparatus is provided that includes a tubular member, a piston adapted to expand the diameter of the tubular member positioned within the tubular member, and an annular chamber defined by the piston and tubular member. The piston includes a passage for conveying fluids out of the tubular member.

15 According to another embodiment of the present invention, an apparatus is provided that includes a preexisting structure and a tubular member coupled to the preexisting structure. The tubular member is coupled to the preexisting structure by the process of: positioning the tubular member in an overlapping relationship to the preexisting structure, placing a mandrel within the tubular
20 member, pressurizing an annular region within the tubular member above the mandrel, and displacing the mandrel with respect to the tubular member.

According to another embodiment of the present invention, a method of expanding a tubular member is provided that includes preforming the tubular member to include a first portion, a second portion, and a third portion, placing
25 a mandrel within the second portion of the tubular member, pressurizing a region within the tubular member; and displacing the mandrel with respect to the tubular member. The inside diameter of the second portion of the tubular member is greater than the inside diameters of the first and third portions of the tubular member.

30 According to another embodiment of the present invention, an apparatus for radially expanding a tubular member is provided that includes a first tubular member, a second tubular member coupled to the first tubular member,

previously installed casing of an upper borehole interval. As a consequence of this procedure the casing of the lower interval is of smaller diameter than the casing of the upper interval. Thus, the casings are in a nested arrangement with casing diameters decreasing in downward direction. Cement annuli are
5 provided between the outer surfaces of the casings and the borehole wall to seal the casings from the borehole wall. As a consequence of this nested arrangement a relatively large borehole diameter is required at the upper part of the wellbore. Such a large borehole diameter involves increased costs due to heavy casing handling equipment, large drill bits and increased volumes of
10 drilling fluid and drill cuttings. Moreover, increased drilling rig time is involved due to required cement pumping, cement hardening, required equipment changes due to large variations in hole diameters drilled in the course of the well, and the large volume of cuttings drilled and removed.

Conventionally, at the surface end of the wellbore, a wellhead is formed
15 that typically includes a surface casing, a number of production and/or drilling spools, valving, and a Christmas tree. Typically the wellhead further includes a concentric arrangement of casings including a production casing and one or more intermediate casings. The casings are typically supported using load bearing slips positioned above the ground. The conventional design and
20 construction of wellheads is expensive and complex.

Conventionally, a wellbore casing cannot be formed during the drilling of a wellbore. Typically, the wellbore is drilled and then a wellbore casing is formed in the newly drilled section of the wellbore. This delays the completion of a well.

25 The present invention is directed to overcoming one or more of the limitations of the existing procedures for forming wellbores and wellheads.

Summary

According to another embodiment of the present invention, a method of expanding a tubular member is provided that includes placing a mandrel within
30 the tubular member, pressurizing an annular region within the tubular member above the mandrel, and displacing the mandrel with respect to the tubular member.

FIG. 1c is another fragmentary cross-sectional illustration of the apparatus of FIG. 1a.

FIG. 2a is a fragmentary cross-section illustration of an embodiment of an apparatus and method for expanding tubular members.

5 FIG. 2b is another fragmentary cross-sectional illustration of the apparatus of FIG. 2a.

FIG. 2c is another fragmentary cross-sectional illustration of the apparatus of FIG. 2a.

10 FIG. 2d is another fragmentary cross-sectional illustration of the apparatus of FIG. 2a.

FIG. 2e is another fragmentary cross-sectional illustration of the apparatus of FIG. 2a.

Detailed Description of the Illustrative Embodiments

Referring now to FIGS. 1a, 1b and 1c, an apparatus 100 for expanding a
15 tubular member will be described. In a preferred embodiment, the apparatus 100 includes a support member 105, a packer 110, a first fluid conduit 115, an annular fluid passage 120, fluid inlets 125, an annular seal 130, a second fluid conduit 135, a fluid passage 140, a mandrel 145, a mandrel launcher 150, a tubular member 155, slips 160, and seals 165. In a preferred embodiment, the
20 apparatus 100 is used to radially expand the tubular member 155. In this manner, the apparatus 100 may be used to form a wellbore casing, line a wellbore casing, form a pipeline, line a pipeline, form a structural support member, or repair a wellbore casing, pipeline or structural support member. In a preferred embodiment, the apparatus 100 is used to clad at least a portion of
25 the tubular member 155 onto a preexisting tubular member.

The support member 105 is preferably coupled to the packer 110 and the mandrel launcher 150. The support member 105 preferably is a tubular member fabricated from any number of conventional commercially available materials such as, for example, oilfield country tubular goods, low alloy steel,
30 carbon steel, or stainless steel. The support member 105 is preferably selected to fit through a preexisting section of wellbore casing 170. In this manner, the apparatus 100 may be positioned within the wellbore casing 170. In a preferred

a third tubular member coupled to the second tubular member, and a mandrel positioned within the second tubular member and coupled to an end portion of the third tubular member. The inside diameter of the second tubular member is greater than the inside diameters of the first and third tubular members.

5 According to another embodiment of the present invention, an apparatus is provided that includes a tubular member having first, second, and third portions, a piston adapted to expand the diameter of the tubular member positioned within the second portion of the tubular member, the piston including a passage for conveying fluids out of the tubular member. The inside
10 diameter of the second portion of the tubular member is greater than the inside diameters of the first and third portions of the tubular member.

 According to another embodiment of the present invention, an apparatus is provided that includes a preexisting structure and a tubular member coupled to the preexisting structure. The tubular member is coupled to the preexisting
15 structure by the process of: preforming the tubular member to include first, second, and third portions, positioning the tubular member in an overlapping relationship to the preexisting structure; placing a mandrel within the second portion of the tubular member; pressurizing an interior region within the
20 tubular member; and displacing the mandrel with respect to the tubular member. The inside diameter of the second portion of the tubular member is greater than the inside diameters of the first and third portions of the tubular member.

 The present embodiments of the invention provide methods and apparatus for forming and/or repairing wellbore casings, pipelines, and/or
25 structural supports by radially expanding tubular members. In this manner, the formation and repair of wellbore casings, pipelines, and structural supports is improved.

Brief Description of the Drawings

 FIG. 1a is a fragmentary cross-section illustration of an embodiment of
30 an apparatus and method for expanding tubular members.

 FIG. 1b is another fragmentary cross-sectional illustration of the apparatus of FIG. 1a.

pressures and flow rates ranging from about 0 to 9,000 psi and 0 to 3,000 gallons/minute in order to optimally provide flow rates and operational pressures for the radial expansion process.

5 The annular seal 130 is coupled to the first fluid conduit 115 and the second fluid conduit 135. The annular seal 130 preferably provides a fluid seal between the interior surface of the first fluid conduit 115 and the exterior surface of the second fluid conduit 135. The annular seal 130 preferably provides a fluid seal between the interior surface of the first fluid conduit 115 and the exterior surface of the second fluid conduit 135 during relative axial
10 motion of the first fluid conduit 115 and the second fluid conduit 135. The annular seal 130 may be any number of conventional commercially available seals such as, for example, O-rings, polypak seals, or metal spring energized seals. In a preferred embodiment, the annular seal 130 is a polypak seal available from Parker Seals.

15 The second fluid conduit 135 is coupled to the annular seal 130 and the mandrel 145. The second fluid conduit preferably is a tubular member fabricated from any number of conventional commercially available materials such as, for example, coiled tubing, oilfield country tubular goods, low alloy steel, stainless steel, or low carbon steel. In a preferred embodiment, the
20 second fluid conduit 135 is adapted to convey fluidic materials such as cement, water, epoxy, lubricants, and slag mix at operating pressures and flow rates ranging from about 0 to 9,000 psi and 0 to 3,000 gallons/minute in order to optimally provide flow rates and operational pressures for the radial expansion process.

25 The fluid passage 140 is coupled to the second fluid conduit 135 and the mandrel 145. In a preferred embodiment, the fluid passage 140 is adapted to convey fluidic materials such as cement, water, epoxy, lubricants, and slag mix at operating pressures and flow rates ranging from about 0 to 9,000 psi and 0 to 3,000 gallons/minute in order to optimally provide flow rates and operational
30 pressures for the radial expansion process.

The mandrel 145 is coupled to the second fluid conduit 135 and the mandrel launcher 150. The mandrel 145 preferably are an annular member

embodiment, the support member 105 is releasably coupled to the mandrel launcher 150. In this manner, the support member 105 may be decoupled from the mandrel launcher 150 upon the completion of an extrusion operation.

The packer 110 is coupled to the support member 105 and the first fluid
5 conduit 115. The packer 110 preferably provides a fluid seal between the outside surface of the first fluid conduit 115 and the inside surface of the support member 105. In this manner, the packer 110 preferably seals off and, in combination with the support member 105, first fluid conduit 115, second fluid conduit 135, and mandrel 145, defines an annular chamber 175. The
10 packer 110 may be any number of conventional commercially available packers modified in accordance with the teachings of the present disclosure. In a preferred embodiment, the packer 110 is an RTTS packer available from Halliburton Energy Services in order to optimally provide high load and pressure containment capacity while also allowing the packer to be set and
15 unset multiple times without having to pull the packer out of the wellbore.

The first fluid conduit 115 is coupled to the packer 110 and the annular seal 130. The first fluid conduit 115 preferably is an annular member fabricated from any number of conventional commercially available materials such as, for example, oilfield country tubular goods, low alloy steel, carbon steel,
20 or stainless steel. In a preferred embodiment, the first fluid conduit 115 includes one or more fluid inlets 125 for conveying fluidic materials from the annular fluid passage 120 into the chamber 175.

The annular fluid passage 120 is defined by and positioned between the interior surface of the first fluid conduit 115 and the interior surface of the
25 second fluid conduit 135. The annular fluid passage 120 is preferably adapted to convey fluidic materials such as cement, water, epoxy, lubricants, and slag mix at operating pressures and flow rates ranging from about 0 to 3,000 gallons/minute and 0 to 9,000 psi in order to optimally provide flow rates and operational pressures for the radial expansion process.

30 The fluid inlets 125 are positioned in an end portion of the first fluid conduit 115. The fluid inlets 125 preferably are adapted to convey fluidic materials such as cement, water, epoxy, lubricants, and slag mix at operating

launcher 150 may be removed from the wellbore 180 upon the completion of an extrusion operation.

In an alternative embodiment, the support member 105 and the mandrel launcher 150 are integrally formed. In this alternative embodiment, the support member 105 preferably terminates above the top of the packer 110. In this alternative embodiment, the fluid conduits 115 and/or 135 provide structural support for the apparatus 100, using the packer 110 to couple together the elements of the apparatus 100. In this alternative embodiment, in a preferred embodiment, during the radial expansion process, the packer 110 may be unset and reset, after the slips 160 have anchored the tubular member 155 to the previous casing 170, within the tubular member 155, between radial expansion operations. In this manner, the packer 110 is moved downhole and the apparatus 100 is re-stroked.

The tubular member 155 is coupled to the mandrel launcher, the slips 160 and the seals 165. The tubular member 155 preferably is a tubular member fabricated from any number of conventional commercially available materials such as, for example, low alloy steel, carbon steel, stainless steel, or oilfield country tubular goods. In a preferred embodiment, the tubular member 155 is fabricated from oilfield country tubular goods.

The slips 160 are coupled to the outside surface of the tubular member 155. The slips 160 preferably are adapted to couple to the interior walls of a casing, pipeline or other structure upon the radial expansion of the tubular member 155. In this manner, the slips 160 provide structural support for the expanded tubular member 155. The slips 160 may be any number of conventional commercially available slips such as, for example, RTTS packer tungsten carbide slips, RTTS packer wicker type mechanical slips or Model 3L retrievable bridge plug tungsten carbide upper mechanical slips. In a preferred embodiment, the slips 160 are RTTS packer tungsten carbide mechanical slips available from Halliburton Energy Services. In a preferred embodiment, the slips 160 are adapted to support axial forces ranging from about 0 to 750,000 lbf.

having a conic section fabricated from any number of conventional commercially available materials such as, for example, machine tool steel, ceramics, tungsten carbide, titanium or other high strength alloys. In a preferred embodiment, the angle of the conic section of the mandrel 145 ranges from about 0 to 30 degrees in order to optimally expand the mandrel launcher 150 and tubular member 155 in the radial direction. In a preferred embodiment, the surface of the conic section ranges from about 58 to 62 Rockwell C in order to optimally provide high yield strength. In a preferred embodiment, the expansion cone 145 is heat treated in order to optimally provide a hard outer surface and a resilient interior body in order to optimally provide abrasion resistance and fracture toughness. In an alternative embodiment, the mandrel 145 is expandible in order to further optimally augment the radial expansion process.

The mandrel launcher 150 is coupled to the support member 105, the mandrel 145, and the tubular member 155. The mandrel launcher 150 preferably are a tubular member having a variable cross-section and a reduced wall thickness in order to facilitate the radial expansion process. In a preferred embodiment, the cross-sectional area of the mandrel launcher 150 at one end is adapted to mate with the mandrel 145, and at the other end, the cross-sectional area of the mandrel launcher 150 is adapted to match the cross-sectional area of the tubular member 155. In a preferred embodiment, the wall thickness of the mandrel launcher 150 ranges from about 50 to 100 % of the wall thickness of the tubular member 155 in order to facilitate the initiation of the radial expansion process.

The mandrel launcher 150 may be fabricated from any number of conventional commercially available materials such as, for example, oilfield country tubular goods, low alloy steel, stainless steel, or carbon steel. In a preferred embodiment, the mandrel launcher 150 is fabricated from oilfield country tubular goods having higher strength but lower wall thickness than the tubular member 155 in order to optimally match the burst strength of the tubular member 155. In a preferred embodiment, the mandrel launcher 150 is removably coupled to the tubular member 155. In this manner, the mandrel

face of the mandrel 145. The extrusion of the mandrel launcher 150 and tubular member 155 off of the face of the mandrel 145 causes the mandrel launcher 150 and tubular member 155 to expand in the radial direction. Continued pumping of the fluidic material 185 preferably causes the entire
5 length of the tubular member 155 to expand in the radial direction.

In a preferred embodiment, the pumping rate and pressure of the fluidic material 185 is reduced during the latter stages of the extrusion process in order to minimize shock to the apparatus 100. In a preferred embodiment, the apparatus 100 includes shock absorbers for absorbing the shock caused by the
10 completion of the extrusion process.

In a preferred embodiment, the extrusion process causes the mandrel 145 to move in an axial direction 185. During the axial movement of the mandrel, in a preferred embodiment, the fluid passage 140 conveys fluidic material 190 displaced by the moving mandrel 145 out of the wellbore 180. In
15 this manner, the operational efficiency and speed of the extrusion process is enhanced.

In a preferred embodiment, the extrusion process includes the injection of a hardenable fluidic material into the annular region between the tubular member 155 and the bore hole 180. In this manner, a hardened sealing layer is
20 provided between the expanded tubular member 155 and the interior walls of the wellbore 180.

As illustrated in FIG. 1c, in a preferred embodiment, upon the completion of the extrusion process, the support member 105, packer 110, first fluid conduit 115, annular seal 130, second fluid conduit 135, mandrel 145, and
25 mandrel launcher 150 are moved from the wellbore 180.

In an alternative embodiment, the apparatus 100 is used to repair a preexisting wellbore casing or pipeline. In this alternative embodiment, both ends of the tubular member 155 preferably include slips 160 and seals 165.

In an alternative embodiment, the apparatus 100 is used to form a
30 tubular structural support for a building or offshore structure.

Referring now to FIGS. 2a, 2b, 2c, 2d, and 2e, an apparatus 200 for expanding a tubular member will be described. In a preferred embodiment, the

The seals 165 are coupled to the outside surface of the tubular member 155. The seals 165 preferably provide a fluidic seal between the outside surface of the expanded tubular member 155 and the interior walls of a casing, pipeline or other structure upon the radial expansion of the tubular member 155. In this manner, the seals 165 provide a fluidic seal for the expanded tubular member 155. The seals 165 may be any number of conventional commercially available seals such as, for example, nitrile rubber, lead, Aflas rubber, Teflon, epoxy, or other elastomers. In a preferred embodiment, the seals 165 are rubber seals available from numerous commercial vendors in order to optimally provide pressure sealing and load bearing capacity.

During operation of the apparatus 100, the apparatus 100 is preferably lowered into a wellbore 180 having a preexisting section of wellbore casing 170. In a preferred embodiment, the apparatus 100 is positioned with at least a portion of the tubular member 155 overlapping with a portion of the wellbore casing 170. In this manner, the radial expansion of the tubular member 155 will preferably cause the outside surface of the expanded tubular member 155 to couple with the inside surface of the wellbore casing 170. In a preferred embodiment, the radial expansion of the tubular member 155 will also cause the slips 160 and seals 165 to engage with the interior surface of the wellbore casing 170. In this manner, the expanded tubular member 155 is provided with enhanced structural support by the slips 160 and an enhanced fluid seal by the seals 165.

As illustrated in FIG. 1b, after placement of the apparatus 100 in an overlapping relationship with the wellbore casing 170, a fluidic material 185 is preferably pumped into the chamber 175 using the fluid passage 120 and the inlet passages 125. In a preferred embodiment, the fluidic material is pumped into the chamber 175 at operating pressures and flow rates ranging from about 0 to 9,000 psi and 0 to 3,000 gallons/minute in order to optimally provide flow rates and operational pressures for the radial expansion process. The pumped fluidic material 185 increase the operating pressure within the chamber 175. The increased operating pressure in the chamber 175 then causes the mandrel 145 to extrude the mandrel launcher 150 and tubular member 155 off of the

The mandrel launcher 210 may be fabricated from any number of conventional commercially available materials such as, for example, oilfield country tubular goods, low alloy steel, stainless steel, or carbon steel. In a preferred embodiment, the mandrel launcher 210 is fabricated from oilfield country tubular goods having higher strength but lower wall thickness than the tubular member 225 in order to optimally match the burst strength of the tubular member 225. In a preferred embodiment, the mandrel launcher 210 is removably coupled to the tubular member 225. In this manner, the mandrel launcher 210 may be removed from the wellbore 260 upon the completion of an extrusion operation.

The mandrel 215 is coupled to the mandrel launcher 210. The mandrel 215 preferably are an annular member having a conic section fabricated from any number of conventional commercially available materials such as, for example, machine tool steel, ceramics, tungsten carbide, titanium or other high strength alloys. In a preferred embodiment, the angle of the conic section of the mandrel 215 ranges from about 0 to 30 degrees in order to optimally expand the mandrel launcher 210 and the tubular member 225 in the radial direction. In a preferred embodiment, the surface of the conic section ranges from about 58 to 62 Rockwell C in order to optimally provide high yield strength. In a preferred embodiment, the expansion cone 215 is heat treated in order to optimally provide a hard outer surface and a resilient interior body in order to optimally provide abrasion resistance and fracture toughness. In an alternative embodiment, the mandrel 215 is expandible in order to further optimally augment the radial expansion process.

The fluid passage 220 is positioned within the mandrel 215. The fluid passage 220 is preferably adapted to convey fluidic materials such as cement, water, epoxy, lubricants, and slag mix at operating pressures and flow rates ranging from about 0 to 9,000 psi and 0 to 3,000 gallons/minute in order to optimally provide flow rates and operational pressures for the radial expansion process. The fluid passage 220 preferably includes an inlet 265 adapted to receive a plug, or other similar device. In this manner, the interior chamber

apparatus 200 includes a support member 205, a mandrel launcher 210, a mandrel 215, a first fluid passage 220, a tubular member 225, slips 230, seals 235, a shoe 240, and a second fluid passage 245. In a preferred embodiment, the apparatus 200 is used to radially expand the mandrel launcher 210 and
5 tubular member 225. In this manner, the apparatus 200 may be used to form a wellbore casing, line a wellbore casing, form a pipeline, line a pipeline, form a structural support member, or repair a wellbore casing, pipeline or structural support member. In a preferred embodiment, the apparatus 200 is used to clad at least a portion of the tubular member 225 onto a preexisting structural
10 member.

The support member 205 is preferably coupled to the mandrel launcher 210. The support member 205 preferably is a tubular member fabricated from any number of conventional commercially available materials such as, for example, oilfield country tubular goods, low alloy steel, carbon steel, or stainless
15 steel. The support member 205, the mandrel launcher 210, the tubular member 225, and the shoe 240 are preferably selected to fit through a preexisting section of wellbore casing 250. In this manner, the apparatus 200 may be positioned within the wellbore casing 270. In a preferred embodiment, the support member 205 is releasably coupled to the mandrel launcher 210. In
20 this manner, the support member 205 may be decoupled from the mandrel launcher 210 upon the completion of an extrusion operation.

The mandrel launcher 210 is coupled to the support member 205 and the tubular member 225. The mandrel launcher 210 preferably are a tubular member having a variable cross-section and a reduced wall thickness in order to
25 facilitate the radial expansion process. In a preferred embodiment, the cross-sectional area of the mandrel launcher 210 at one end is adapted to mate with the mandrel 215, and at the other end, the cross-sectional area of the mandrel launcher 210 is adapted to match the cross-sectional area of the tubular member 225. In a preferred embodiment, the wall thickness of the mandrel
30 launcher 210 ranges from about 50 to 100 % of the wall thickness of the tubular member 225 in order to facilitate the initiation of the radial expansion process.

commercially available shoes such as, for example, a Super Seal II float shoe, a Super Seal II Down-Jet float shoe, or a guide shoe with a sealing sleeve for a latch down plug modified in accordance with the teachings of the present disclosure. In a preferred embodiment, the shoe 240 is an aluminum down-jet guide shoe with a sealing sleeve for a latch down plug, available from
5 Halliburton Energy Services, modified in accordance with the teachings of the present disclosure, in order to optimally guide the tubular member 225 in the wellbore, optimally provide a fluidic seal between the interior and exterior diameters of the overlapping joint between the tubular members, and optimally
10 facilitate the complete drilling out of the shoe and plug upon the completion of the cementing and radial expansion operations.

During operation of the apparatus 200, the apparatus 200 is preferably lowered into a wellbore 260 having a preexisting section of wellbore casing 275. In a preferred embodiment, the apparatus 200 is positioned with at least a
15 portion of the tubular member 225 overlapping with a portion of the wellbore casing 275. In this manner, the radial expansion of the tubular member 225 will preferably cause the outside surface of the expanded tubular member 225 to couple with the inside surface of the wellbore casing 275. In a preferred embodiment, the radial expansion of the tubular member 225 will also cause
20 the slips 230 and seals 235 to engage with the interior surface of the wellbore casing 275. In this manner, the expanded tubular member 225 is provided with enhanced structural support by the slips 230 and an enhanced fluid seal by the seals 235.

As illustrated in FIG. 2b, after placement of the apparatus 200 in an
25 overlapping relationship with the wellbore casing 275, a fluidic material 280 is preferably pumped into the chamber 270. The fluidic material 280 then passes through the fluid passage 220 into the chamber 275. The fluidic material 280 then passes out of the chamber 275, through the fluid passage 245, and into the annular region 270. In a preferred embodiment, the fluidic material 280 is
30 pumped into the chamber 270 at operating pressures and flow rates ranging from about 0 to 9,000 psi and 0 to 3,000 gallons/minute in order to optimally provide flow rates and operational pressures for the radial expansion process.

270 above the mandrel 215 may be fluidically isolated from the interior chamber 275 below the mandrel 215.

The tubular member 225 is coupled to the mandrel launcher 210, the slips 230 and the seals 235. The tubular member 225 preferably is a tubular member fabricated from any number of conventional commercially available materials such as, for example, low alloy steel, carbon steel, stainless steel, or oilfield country tubular goods. In a preferred embodiment, the tubular member 225 is fabricated from oilfield country tubular goods.

The slips 230 are coupled to the outside surface of the tubular member 225. The slips 230 preferably are adapted to couple to the interior walls of a casing, pipeline or other structure upon the radial expansion of the tubular member 225. In this manner, the slips 230 provide structural support for the expanded tubular member 225. The slips 230 may be any number of conventional commercially available slips such as, for example, RTTS packer tungsten carbide mechanical slips, RTTS packer wicker type mechanical slips, or Model 3L retrievable bridge plug tungsten carbide upper mechanical slips. In a preferred embodiment, the slips 230 are adapted to support axial forces ranging from about 0 to 750,000 lbf.

The seals 235 are coupled to the outside surface of the tubular member 225. The seals 235 preferably provide a fluidic seal between the outside surface of the expanded tubular member 225 and the interior walls of a casing, pipeline or other structure upon the radial expansion of the tubular member 225. In this manner, the seals 235 provide a fluidic seal for the expanded tubular member 225. The seals 235 may be any number of conventional commercially available seals such as, for example, nitrile rubber, lead, Aflas rubber, Teflon, epoxy or other elastomers. In a preferred embodiment, the seals 235 are conventional rubber seals available from various commercial vendors in order to optimally provide pressure sealing and load bearing capacity.

The shoe 240 is coupled to the tubular member 225. The shoe 240 preferably is a substantially tubular member having a fluid passage 245 for conveying fluidic materials from the chamber 275 to the annular region 270 outside of the apparatus 200. The shoe 240 may be any number of conventional

As illustrated in FIG. 2e, in a preferred embodiment, upon the completion of the extrusion process, the support member 205, packer 210, first fluid conduit 215, annular seal 230, second fluid conduit 235, mandrel 245, and mandrel launcher 250 are removed from the wellbore 280. In a preferred
5 embodiment, the resulting new section of wellbore casing includes the preexisting wellbore casing 275, the expanded tubular member 225, the slips 230, the seals 235, the shoe 240, and an outer annular layer 4000 of hardened fluidic material.

In an alternative embodiment, the apparatus 200 is used to repair a
10 preexisting wellbore casing or pipeline. In this alternative embodiment, both ends of the tubular member 255 preferably include slips 260 and seals 265.

In an alternative embodiment, the apparatus 200 is used to form a tubular structural support for a building or offshore structure.

In a preferred embodiment, the tubular members 105 and 225; shoes
15 240; expansion cone launchers 150 and 210; and expansion cones 145 and 215 are provided substantially as described in one or more of the following U.S. patent applications: (1) utility patent application number _____, attorney docket number 25791.9.02, filed on 11-16-1999, which claimed the benefit of the filing date of provisional patent application number 60/108,558, attorney
20 docket number 25791.9, filed on 11-16-1998; (2) utility patent application number _____, attorney docket number 25791.3.02, filed on 12-3-1999, which claimed the benefit of the filing date of provisional patent application number 60/111,293, attorney docket number 25791.3, filed on 12-7-1998; (3) utility patent application number _____, attorney docket number
25 25791.8.02, filed on 2-10-2000, which claimed the benefit of the filing date of provisional patent application number 60/119,611, attorney docket number 25791.8, filed on 2-11-1999; (4) provisional patent application number 60/121,702, attorney docket number 25791.7, filed on 2-25-1999; (5) provisional patent application number 60/121,841, attorney docket number 25791.12, filed
30 on 2-26-1999; (6) provisional patent application number 60/121,907, attorney docket number 25791.16, filed on 2-26-1999; (7) provisional patent application number 60/124,042, attorney docket number 25791.11, filed on 3-11-1999; (8)

In a preferred embodiment, the fluidic material 280 is a hardenable fluidic sealing material in order to form a hardened outer annular member around the expanded tubular member 225.

As illustrated in FIG. 2c, at some later point in the process, a ball 285,
5 plug or other similar device, is introduced into the pumped fluidic material 280. In a preferred embodiment, the ball 285 mates with and seals off the inlet 265 of the fluid passage 220. In this manner, the chamber 270 is fluidically isolated from the chamber 275.

As illustrated in FIG. 2d, after placement of the ball 285 in the inlet 265
10 of the fluid passage 220, a fluidic material 290 is pumped into the chamber 270. The fluidic material is preferably pumped into the chamber 270 at operating pressures and flow rates ranging from about 0 to 9,000 psi and 0 to 3,000 gallons/minute in order to provide optimal operating efficiency. The fluidic material 290 may be any number of conventional commercially available
15 materials such as, for example, water, drilling mud, cement, epoxy, or slag mix. In a preferred embodiment, the fluidic material 290 is a non-hardenable fluidic material in order to maximize operational efficiency.

Continued pumping of the fluidic material 290 increases fluidic material 280 increases the operating pressure within the chamber 270. The increased
20 operating pressure in the chamber 270 then causes the mandrel 215 to extrude the mandrel launcher 210 and tubular member 225 off of the conical face of the mandrel 215. The extrusion of the mandrel launcher 210 and tubular member 225 off of the conical face of the mandrel 215 causes the mandrel launcher 210 and tubular member 225 to expand in the radial direction. Continued pumping
25 of the fluidic material 290 preferably causes the entire length of the tubular member 225 to expand in the radial direction.

In a preferred embodiment, the pumping rate and pressure of the fluidic material 290 is reduced during the latter stages of the extrusion process in order to minimize shock to the apparatus 200. In a preferred embodiment, the
30 apparatus 200 includes shock absorbers for absorbing the shock caused by the completion of the extrusion process. In a preferred embodiment, the extrusion process causes the mandrel 215 to move in an axial direction 295.

Claims

What is claimed is:

- 1 1. A method of coupling a tubular member to a preexisting structure,
2 comprising:
3 positioning the tubular member in an overlapping relationship to the
4 preexisting structure;
5 placing a mandrel within the tubular member;
6 pressurizing an annular region within the tubular member above the
7 mandrel; and
8 displacing the mandrel with respect to the tubular member.
- 1 2. The method of claim 1, further comprising:
2 removing fluids within the tubular member that are displaced by the
3 displacement of the mandrel.
- 1 3. The method of claim 2, wherein the removed fluids pass inside the
2 annular region.
- 1 4. The method of claim 1, wherein the volume of the annular region
2 increases.
- 1 5. The method of claim 1, further including sealing off the annular region.
- 1 6. The method of claim 5, wherein sealing off the annular region includes
2 sealing a stationary member and sealing a non-stationary member.
- 1 7. The method of claim 1, further including conveying fluids in opposite
2 directions.
- 1 8. The method of claim 1, further including conveying a pressurized fluid
2 and a non-pressurized fluid in opposite directions.

- provisional patent application number 60/131,106, attorney docket number 25791.23, filed on 4-26-1999; (9) provisional patent application number 60/137,998, attorney docket number 25791.17, filed on 6-7-1999; (10) provisional patent application number 60/143,039, attorney docket number 25791.26, filed on 7-9-1999; (11) provisional patent application number 60/146,203, attorney docket number 25791.25, filed on 7-29-1999; (12) provisional patent application number _____, attorney docket number 25791.29, filed on 9-16-1999; (13) provisional patent application number _____, attorney docket number 25791.34, filed on 10-12-1999; (14) provisional patent application number _____, attorney docket number 25791.36, filed on 10-12-1999; (13) provisional patent application number 60/159,033, attorney docket number 25791.37, filed on 10-12-1999; (15) provisional patent application number _____, attorney docket number 25791.27, filed on 11-01-1999. Applicants incorporate by reference the disclosures of these applications.

- Although illustrative embodiments of the invention have been shown and described, a wide range of modification, changes and substitution is contemplated in the foregoing disclosure. In some instances, some features of the present invention may be employed without a corresponding use of the other features. Accordingly, it is appropriate that the appended claims be construed broadly and in a manner consistent with the scope of the invention.

- 1 16. The apparatus of claim 11, further including:
2 an annular chamber defined by the first tubular member, the second
3 tubular member, the third tubular member, the first annular
4 sealing member, the second annular sealing member, and the
5 mandrel; and
6 an annular passage defined by the second tubular member and the third
7 tubular member.
- 1 17. The apparatus of claim 16, wherein the annular chamber and the
2 annular passage are fluidically coupled.
- 1 18. The apparatus of claim 11, further including one or more slips coupled to
2 the exterior surface of the first tubular member.
- 1 19. The apparatus of claim 11, wherein the mandrel includes a conical
2 surface.
- 1 20. The apparatus of claim 19, wherein the angle of attack of the conical
2 surface ranges from about 0 to 30 degrees.
- 1 21. The apparatus of claim 19, wherein the conical surface has a surface
2 hardness ranging from about 58 to 62 Rockwell C.
- 1 22. An apparatus, comprising:
2 a tubular member;
3 a piston adapted to expand the diameter of the tubular member
4 positioned within the tubular member, the piston including a
5 passage for conveying fluids out of the tubular member; and
6 an annular chamber defined by the piston and tubular member.
- 1 23. The apparatus of claim 22, wherein the piston includes a conical surface.

1 9. The method of claim 1, wherein the pressurizing is provided at operating
2 pressures ranging from about 0 to 9,000 psi.

1 10. The method of claim 1, wherein the pressurizing is provided at flow rates
2 ranging from about 0 to 3,000 gallons/minute.

1 11. An apparatus for radially expanding a tubular member, comprising:
2 a first tubular member;
3 a second tubular member positioned within the first tubular member;
4 a third tubular member movably coupled to and positioned within the
5 second tubular member;
6 a first annular sealing member for sealing an interface between the first
7 and second tubular members;
8 a second annular sealing member for sealing an interface between the
9 second and third tubular members; and
10 a mandrel positioned within the first tubular member and coupled to an
11 end of the third tubular member.

1 12. The apparatus of claim 11, further including an annular chamber defined
2 by the first tubular member, the second tubular member, the third tubular
3 member, the first annular sealing member, the second annular sealing member,
4 and the mandrel.

1 13. The apparatus of claim 11, further including an annular passage defined
2 by the second tubular member and the third tubular member.

1 14. The apparatus of claim 11, further including a fluid passage contained
2 within the third tubular member and the mandrel.

1 15. The apparatus of claim 11, further including one or more sealing
2 members coupled to an exterior surface of the first tubular member.

1 31. The apparatus of claim 27, wherein the process for coupling the second
2 tubular member to the first tubular member further comprises sealing off the
3 annular region.

1 32. The apparatus of claim 31, wherein sealing off the annular region
2 includes sealing a stationary member and sealing a non-stationary member.

1 33. The apparatus of claim 27, wherein the process for coupling the second
2 tubular member to the first tubular member further comprises conveying fluids
3 in opposite directions.

1 34. The apparatus of claim 27, wherein the process for coupling the second
2 tubular member to the first tubular member further comprises conveying a
3 pressurized fluid and a non-pressurized fluid in opposite directions.

1 35. The apparatus of claim 27, wherein the pressurizing is provided at
2 operating pressures ranging from about 0 to 9,000 psi.

1 36. The apparatus of claim 27, wherein the pressuring is provided at flow
2 rates ranging from about 0 to 3,000 gallons/minute.

1 37. The apparatus of claim 27, wherein the first tubular member includes a
2 defective portion; and wherein the second tubular member is positioned in
3 opposing relation to the defective portion.

1 38. A method of coupling a tubular member to a preexisting structure,
2 comprising:
3 preforming the tubular member to include a first portion, a second
4 portion and a third portion;
5 placing a mandrel within the second portion of the tubular member;

- 1 24. The apparatus of claim 23, wherein the angle of attack of the conical
2 surface ranges from about 0 to 30 degrees.
- 1 25. The apparatus of claim 24, wherein the conical surface has a surface
2 hardness ranging from about 58 to 62 Rockwell C.
- 1 26. The apparatus of claim 24, wherein the tubular member includes one or
2 more sealing members coupled to the exterior surface of the tubular member.
- 1 27. An apparatus, comprising:
2 a first tubular member; and
3 a second tubular member coupled to the first tubular member by the
4 process of:
5 positioning the second tubular member in an overlapping
6 relationship to the first tubular member
7 placing a mandrel within the second tubular member;
8 pressurizing an annular region within the second tubular member
9 above the mandrel; and
10 displacing the mandrel with respect to the second tubular
11 member.
- 1 28. The apparatus of claim 27, wherein the process for coupling the second
2 tubular member to the first tubular member further comprises:
3 removing fluids within the second tubular member that are displaced by
4 the displacement of the mandrel.
- 1 29. The apparatus of claim 28, wherein the removed fluids pass inside the
2 annular region.
- 1 30. The apparatus of claim 27, wherein the volume of the annular region
2 increases.

1 45. The apparatus of claim 42, wherein the mandrel includes a conical
2 surface.

1 46. The apparatus of claim 45, wherein the angle of attack of the conical
2 surface ranges from about 0 to 30 degrees.

1 47. The apparatus of claim 45, wherein the conical surface has a surface
2 hardness ranging from about 58 to 62 Rockwell C.

3 48. An apparatus, comprising:
4 a tubular member having a first portion, a second portion, and a third
5 portion; and
6 a piston adapted to expand the diameter of the tubular member
7 positioned within the second portion of the tubular member, the
8 piston including a passage for conveying fluids out of the tubular
9 member;
10 wherein the inside diameter of the second portion of the tubular member
11 is greater than the inside diameters of the first and third portions
12 of the tubular member.

1 50. The apparatus of claim 49, wherein the piston includes a conical surface.

1 51. The apparatus of claim 50, wherein the angle of attack of the conical
2 surface ranges from about 0 to 30 degrees.

1 52. The apparatus of claim 50, wherein the conical surface has a surface
2 hardness ranging from about 58 to 62 Rockwell C.

1 53. The apparatus of claim 49, wherein the tubular member includes one or
2 more sealing members coupled to the exterior surface of the tubular member.

6 positioning the tubular member in an overlapping relationship to the
7 preexisting structure;
8 pressurizing an interior region within the tubular member above the
9 mandrel; and
10 displacing the mandrel with respect to the tubular member;
11 wherein the inside diameter of the second portion of the tubular member
12 is greater than the inside diameters of the first and third portions
13 of the tubular member.

1 39. The method of claim 38, wherein the pressurizing is provided at
2 operating pressures ranging from about 0 to 9,000 psi.

1 40. The method of claim 38, wherein the pressurizing is provided at flow
2 rates ranging from about 0 to 3,000 gallons/minute.

1 41. The method of claim 38, wherein the tubular member is expanded
2 beginning at an upper portion of the tubular member.

1 42. An apparatus for radially expanding a tubular member, comprising:
2 a first tubular member;
3 a second tubular member coupled to the first tubular member;
4 a third tubular member coupled to the second tubular member; and
5 a mandrel positioned within the second tubular member and coupled to
6 an end portion of the third tubular member;
7 wherein the inside diameter of the second tubular member is greater
8 than the inside diameters of the first and third tubular members.

1 43. The apparatus of claim 42, wherein the mandrel includes a fluid passage
2 having an inlet adapted to receive fluid stop member.

1 44. The apparatus of claim 42, further including one or more slips coupled to
2 the exterior surface of the third tubular member.

11 removing fluids within the tubular member that are displaced by the
12 displacement of the mandrel by passing the removed fluids inside
13 of the annular region.

1 58. An apparatus for coupling a tubular member to a preexisting structure,
2 comprising:
3 means for positioning the tubular member in an overlapping relationship
4 to the preexisting structure;
5 means for placing a mandrel within the tubular member;
6 means for sealing off an annular region within the tubular member
7 above the mandrel by sealing a stationary member and sealing a
8 non-stationary member;
9 means for pressurizing the annular region;
10 means for displacing the mandrel with respect to the tubular member;
11 and
12 means for removing fluids within the tubular member that are displaced
13 by the displacement of the mandrel by passing the removed fluids
14 inside of the annular region.

1 59. An apparatus for radially expanding a tubular member, comprising:
2 a first tubular member;
3 a second tubular member positioned within the first tubular member;
4 a third tubular member movably coupled to and positioned within the
5 second tubular member;
6 a first annular sealing member for sealing an interface between the first
7 and second tubular members;
8 a second annular sealing member for sealing an interface between the
9 second and third tubular members;
10 a mandrel positioned within the first tubular member and coupled to an
11 end of the third tubular member;
12 an annular chamber defined by the first tubular member, the second
13 tubular member, the third tubular member, the first annular

1 54. An apparatus, comprising:
2 a preexisting structure; and
3 a tubular member coupled to the preexisting structure by the process of:
4 preforming the tubular member to include a first portion, a second
5 portion and a third portion;
6 placing a mandrel within the second portion of the tubular
7 member;
8 positioning the tubular member in an overlapping relationship to
9 the preexisting structure;
10 pressurizing an interior region within the tubular member above
11 the mandrel; and
12 displacing the mandrel with respect to the tubular member;
13 wherein the inside diameter of the second portion of the tubular
14 member is greater than the inside diameters of the first and
15 third portions of the tubular member.

1 55. The apparatus of claim 54, wherein the pressurizing is provided at
2 operating pressures ranging from about 0 to 9,000 psi.

1 56. The method of claim 54, wherein the pressurizing is provided at flow
2 rates ranging from about 0 to 3,000 gallons/minute.

1 57. A method of coupling a tubular member to a preexisting structure,
2 comprising:
3 positioning the tubular member in an overlapping relationship to the
4 preexisting structure;
5 placing a mandrel within the tubular member;
6 sealing off an annular region within the tubular member above the
7 mandrel by sealing a stationary member and sealing a non-
8 stationary member;
9 pressurizing the annular region;
10 displacing the mandrel with respect to the tubular member; and

8 pressurizing an interior region within the tubular member above the
9 mandrel; and
10 displacing the mandrel with respect to the tubular member;
11 wherein the inside diameter of the second portion of the tubular member
12 is greater than the inside diameters of the first and third portions
13 of the tubular member;
14 wherein the pressurizing is provided at operating pressures ranging from
15 about 0 to 9,000 psi; and
16 wherein the pressurizing is provided at flow rates ranging from about 0
17 to 3,000 gallons/minute.

1 62. An apparatus for coupling a tubular member to a preexisting structure,
2 comprising:
3 means for preforming the tubular member to include a first portion, a
4 second portion and a third portion;
5 means for placing a mandrel within the second portion of the tubular
6 member;
7 means for positioning the tubular member in an overlapping relationship
8 to the preexisting structure;
9 means for pressurizing an interior region within the tubular member
10 above the mandrel; and
11 means for displacing the mandrel with respect to the tubular member;
12 wherein the inside diameter of the second portion of the tubular member
13 is greater than the inside diameters of the first and third portions
14 of the tubular member;
15 wherein the means for pressurizing is provided at operating pressures
16 ranging from about 0 to 9,000 psi; and
17 wherein the means for pressurizing is provided at flow rates ranging
18 from about 0 to 3,000 gallons/minute.

1 63. An apparatus for radially expanding a tubular member, comprising:

14 sealing member, the second annular sealing member, and the
15 mandrel;
16 a fluid passage defined by the third tubular member and the mandrel
17 fluidicly coupled to an interior region of the first tubular member
18 below the mandrel; and
19 an annular passage defined by the second tubular member and the third
20 tubular member fluidicly coupled to the annular chamber.

1 60. An apparatus, comprising:
2 a first tubular member; and
3 a second tubular member coupled to the first tubular member by the
4 process of:
5 positioning the second tubular member in an overlapping relationship to
6 the first tubular member;
7 placing a mandrel within the second tubular member;
8 sealing off an annular region within the second tubular member above
9 the mandrel by sealing a stationary member and sealing a non-
10 stationary member;
11 pressurizing the annular region;
12 displacing the mandrel with respect to the second tubular member; and
13 removing fluids within the second tubular member that are displaced by
14 the displacement of the mandrel by passing the removed fluids
15 inside of the annular region.

1 61. A method of coupling a tubular member to a preexisting structure,
2 comprising:
3 preforming the tubular member to include a first portion, a second
4 portion and a third portion;
5 placing a mandrel within the second portion of the tubular member;
6 positioning the tubular member in an overlapping relationship to the
7 preexisting structure;

18 wherein the pressurizing is provided at flow rates ranging from about 0
19 to 3,000 gallons/minute

2 a first tubular member;
3 a second tubular member coupled to the first tubular member;
4 a third tubular member coupled to the second tubular member;
5 one or more slips coupled to the exterior surface of the third tubular
6 member; and
7 a mandrel having a conical outer surface including an angle of attack
8 between about 0 to 30 degrees and a surface hardness ranging
9 from about 58 to 62 Rockwell C positioned within the second
10 tubular member and coupled to an end portion of the third tubular
11 member;
12 wherein the inside diameter of the second tubular member is greater
13 than the inside diameters of the first and third tubular members;
14 wherein the mandrel includes a fluid passage having an inlet adapted to
15 receive fluid stop member.

1 64. An apparatus, comprising:
2 a preexisting structure; and
3 a tubular member coupled to the preexisting structure by the process of:
4 preforming the tubular member to include a first portion, a second
5 portion and a third portion;
6 placing a mandrel within the second portion of the tubular
7 member;
8 positioning the tubular member in an overlapping relationship to
9 the preexisting structure;
10 pressurizing an interior region within the tubular member above
11 the mandrel; and
12 displacing the mandrel with respect to the tubular member;
13 wherein the inside diameter of the second portion of the tubular member
14 is greater than the inside diameters of the first and third portions
15 of the tubular member;
16 wherein the pressurizing is provided at operating pressures ranging from
17 about 0 to 9,000 psi; and


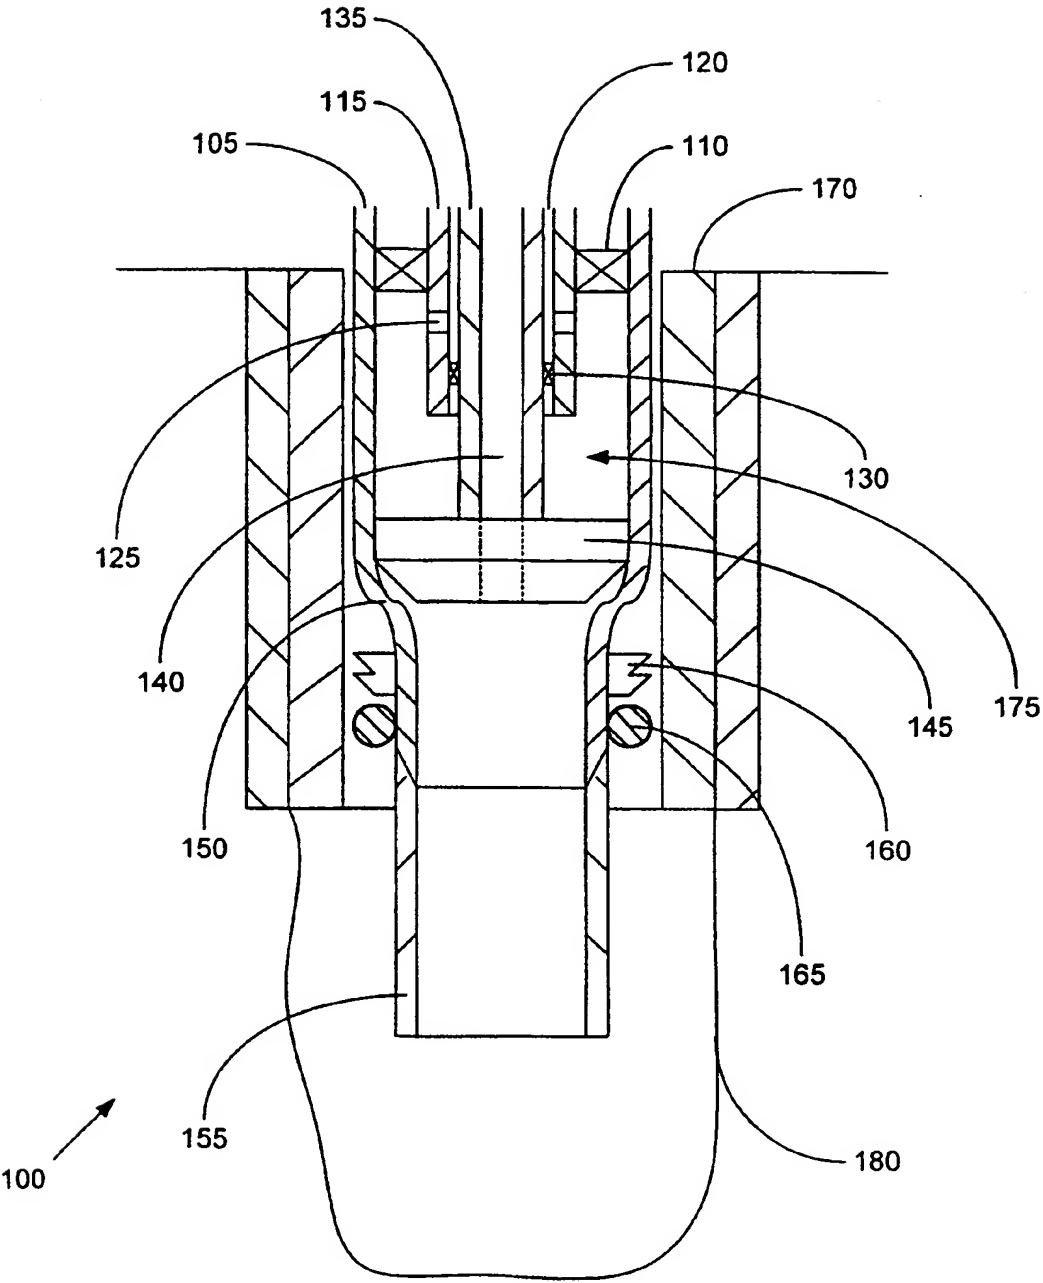


FIG. 1a

2/8

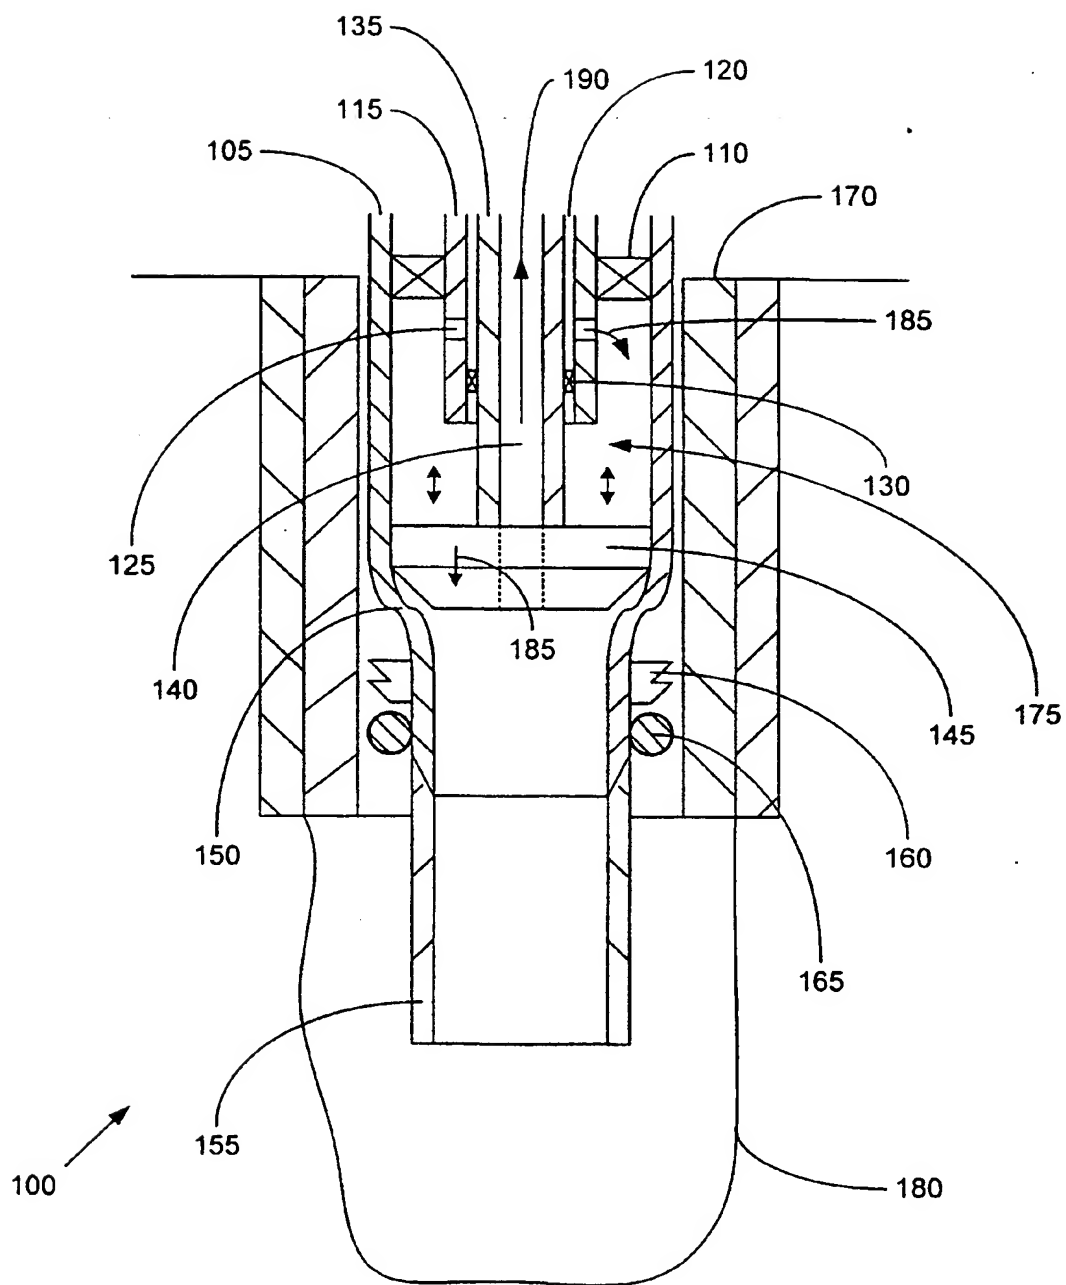

3/8


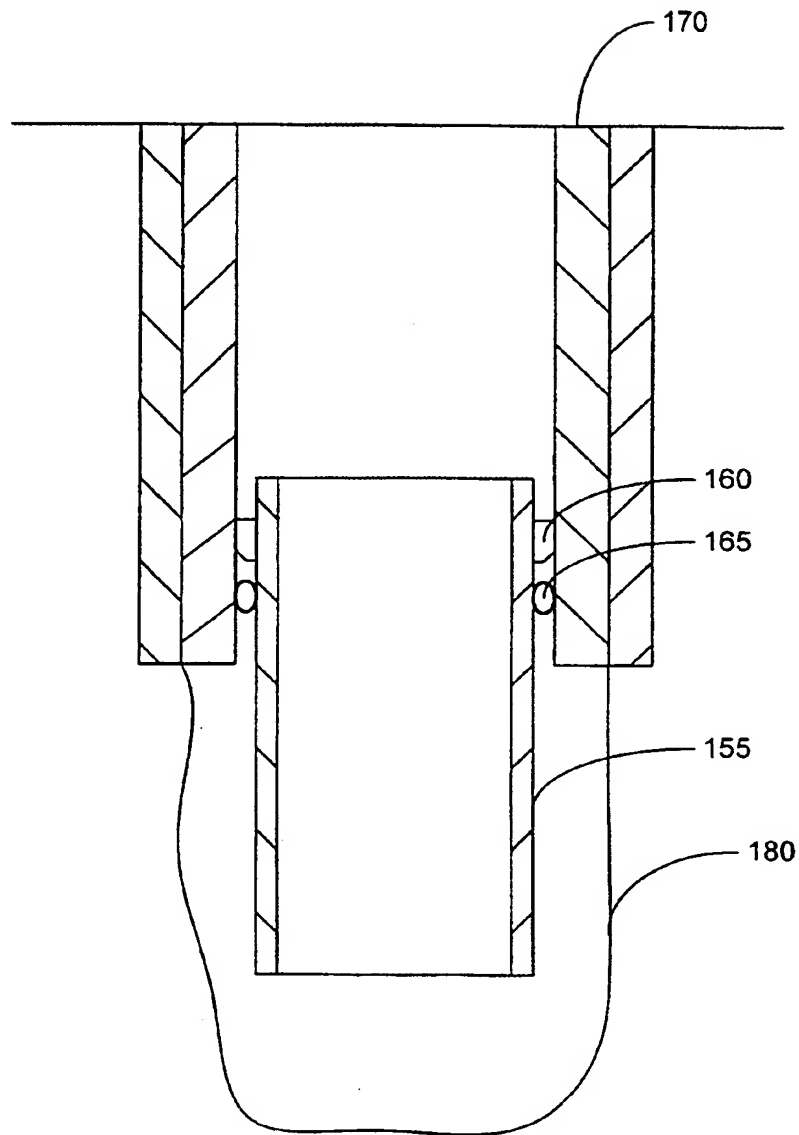


FIG. 1c

4/8

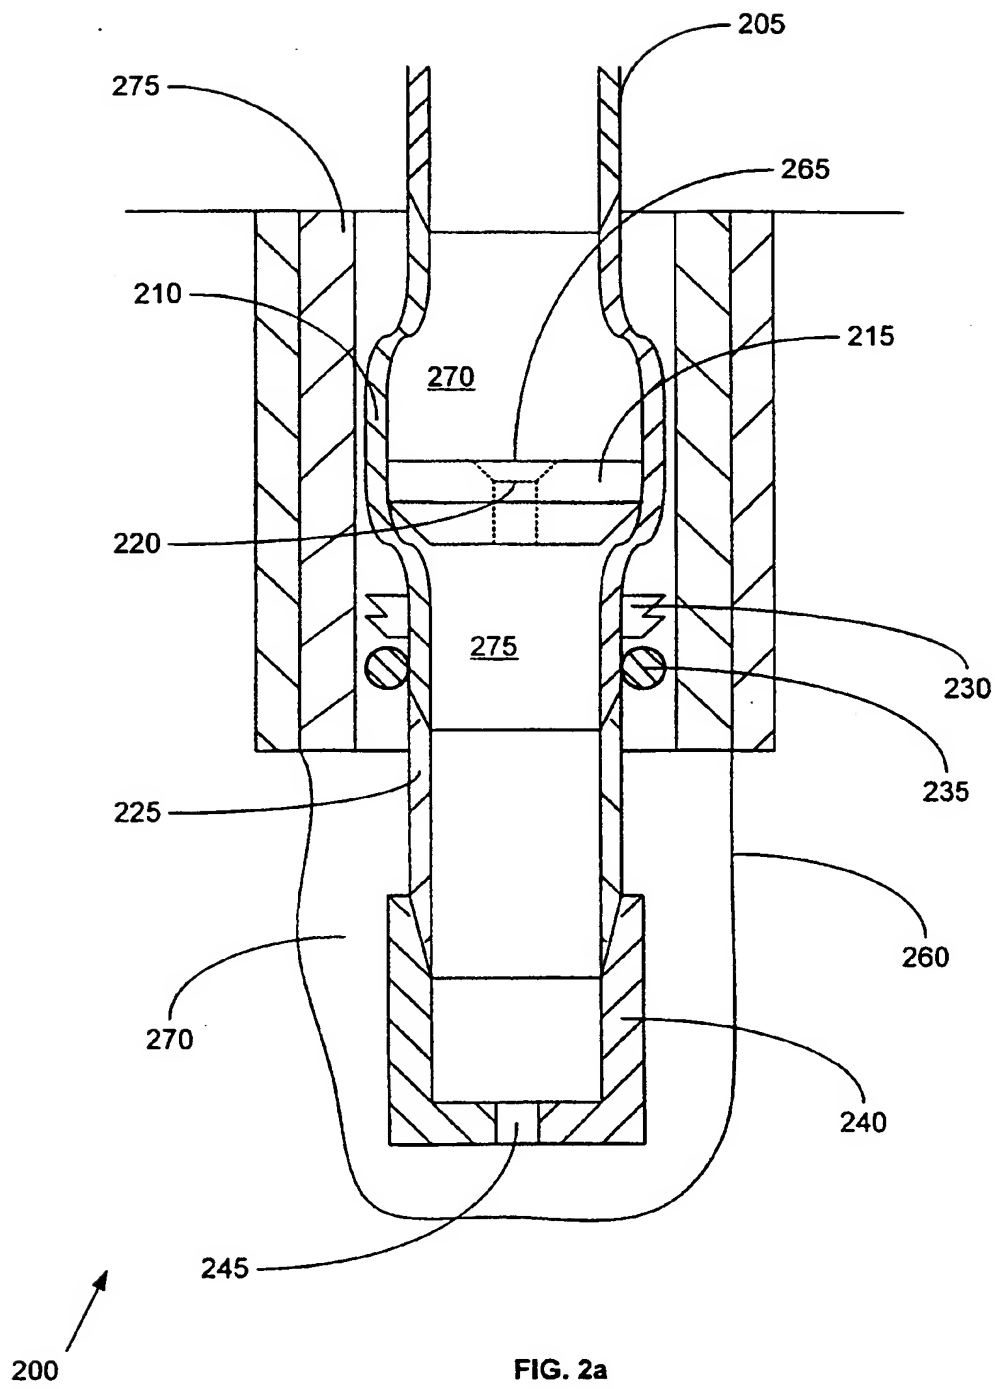

5/8

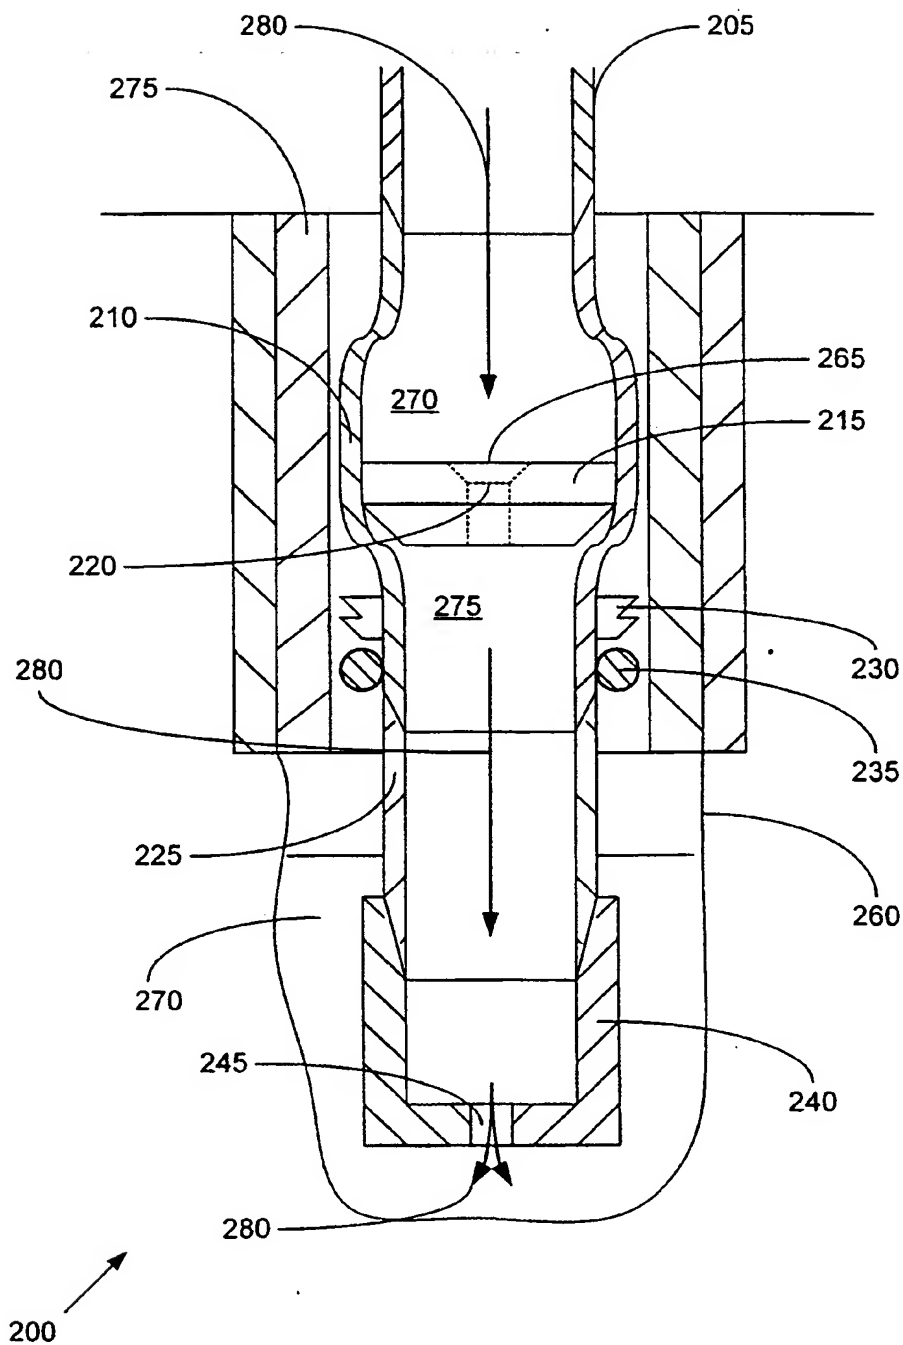


FIG. 2b

6/8

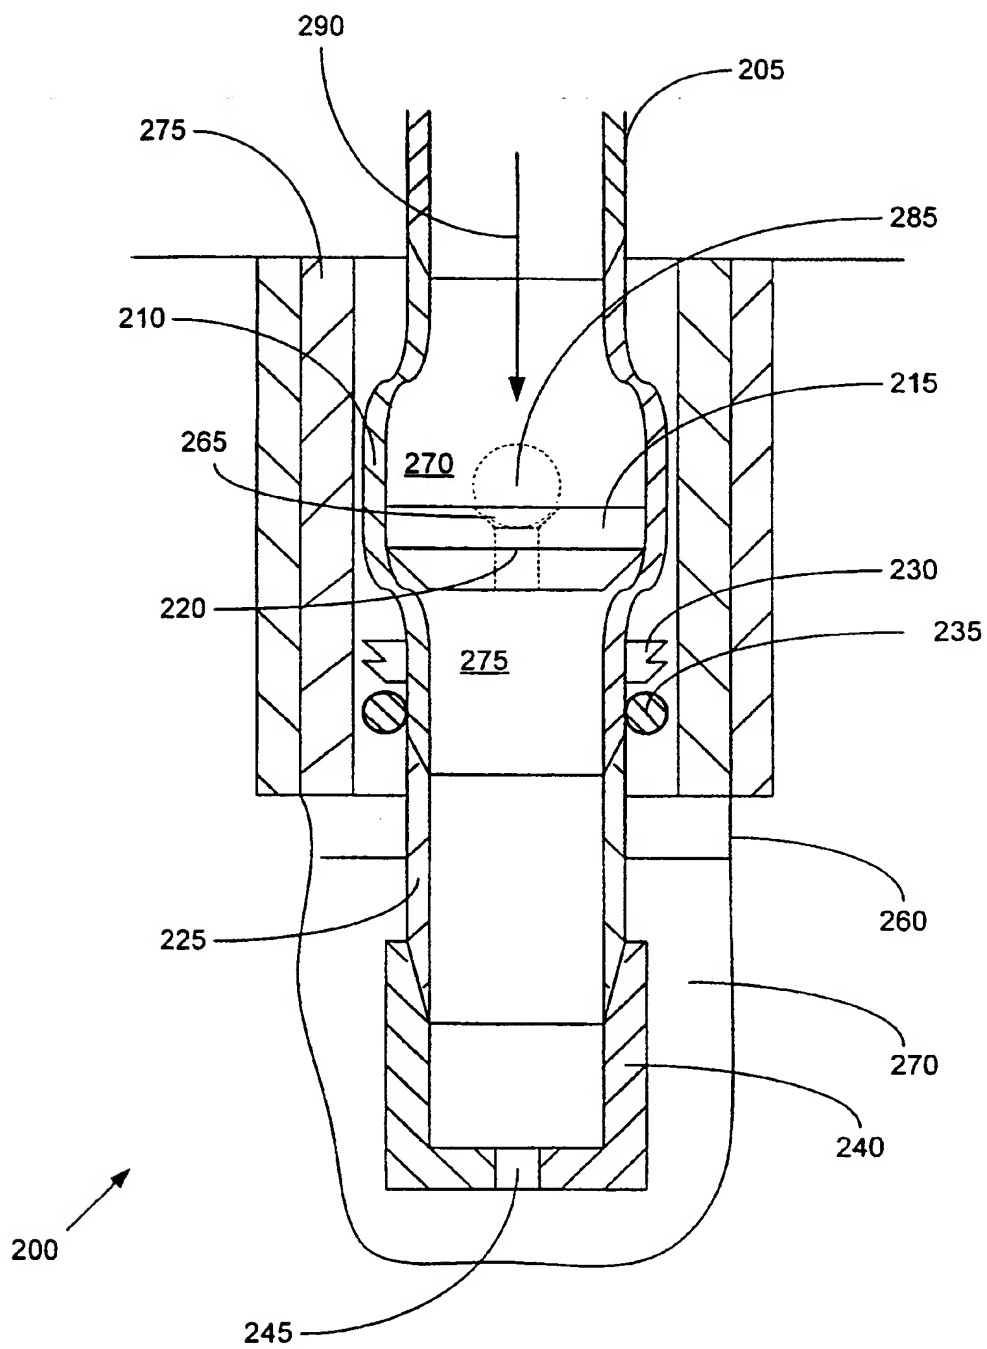


FIG. 2c

7/8

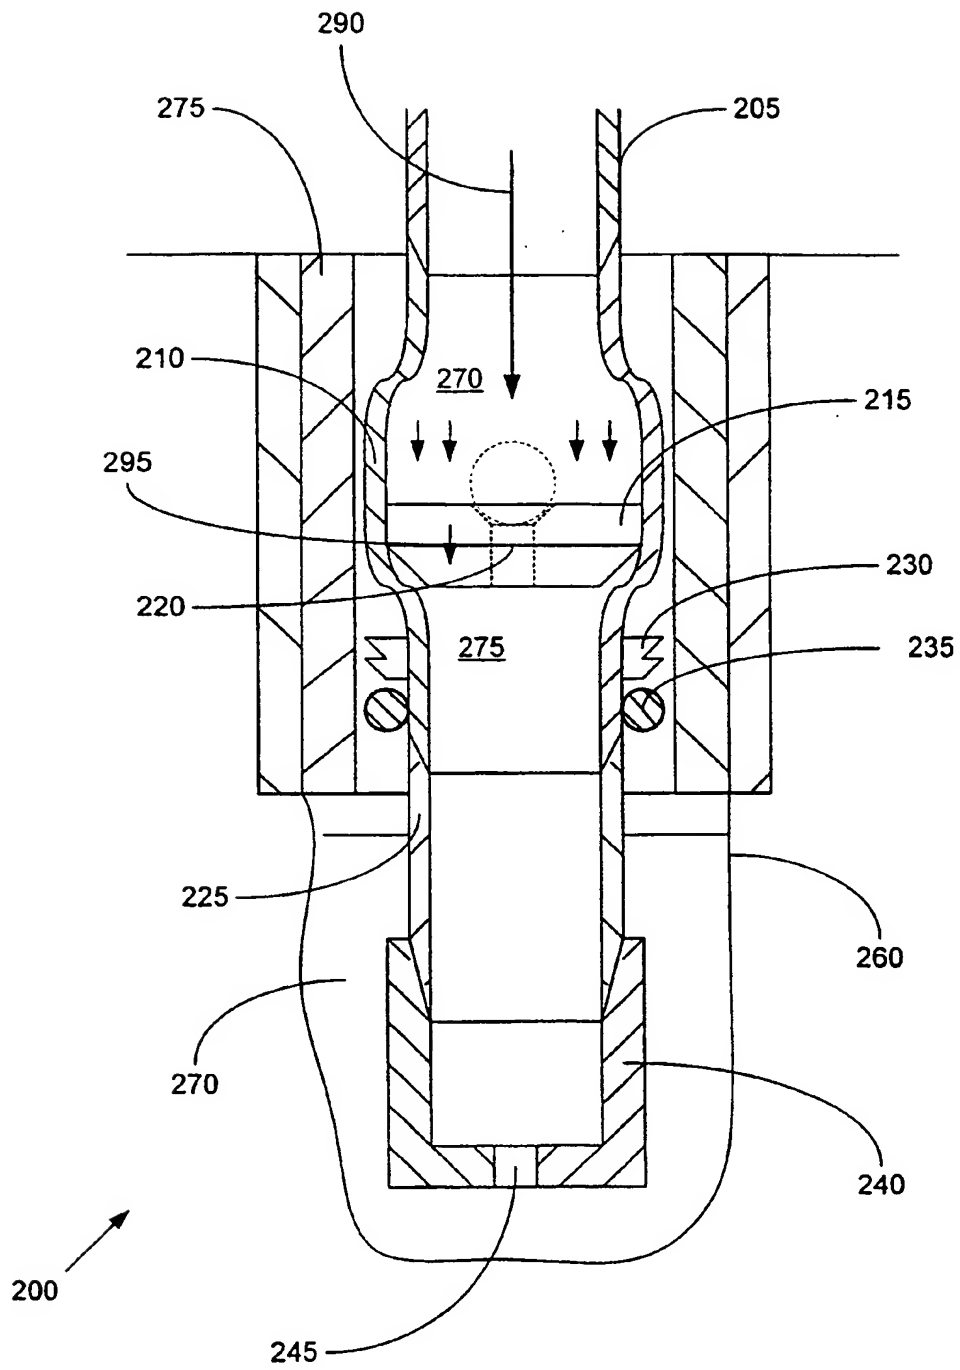


FIG. 2d

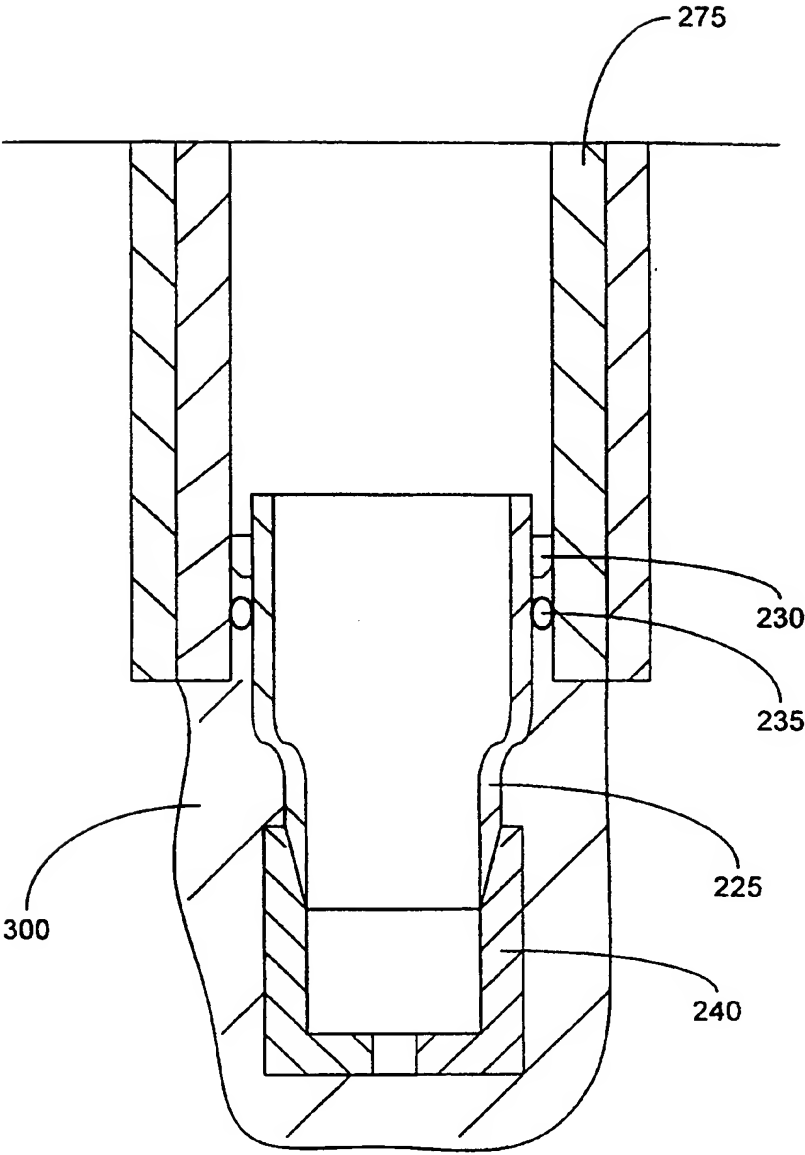


FIG. 2e